
drive.web Datasheet

Model: dw250-DM-HVPD

smarty7 Universal Automation Controller with High Voltage I/O

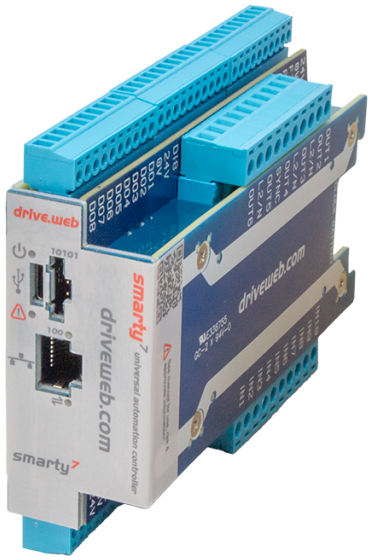

I/O & Connectivity

Analog Inputs	8 (±11V, 16 bits or 5/24 VDC digital)
Analog Outputs	8 (±10.5VDC, 10mA)
Digital Inputs	8 (24VDC)
Digital Outputs	8 (24VDC - Input or Output)
XIO Inputs	10 (24VAC, 120VAC, 240VAC)
XIO Outputs	6 (24VAC - 240VAC, 0.5A with ZVS)
Encoder Inputs	2 (Quadrature A/B or ABZ, 5/24V, 1 Mhz)
Frequency Inputs	6 (24/5 VDC digital 100kHz input or 500kHz, 20mA sink out)
Timing Outputs	1 (30 VDC 500kHz, 20mA sink out)
USB	USB-C (system-wide access)
Ethernet	100BASE-TX with drive.web peer-to-peer
Terminals	80 plug-in, screw type
Communication Protocols	ModbusRTU, ModbusTCP/IP, EIP/PCCC

Software Features

Modbus TCP/IP (04)	Slave/Server
Process Control (05)	Recommended for most applications
Winder Control (06)	Diameter Calc., Taper Tension, Torque Comp.
Math (10)	With advanced math functions
EIP/PCCC (25)	Slave/Server
savvyPanel (26)	Operator station interface
Solar (29)	Calculates sun position azimuth and zenith
Precision Motion (39)	With event, length, position, shaft-lock, indexing, motion control and more

Factory Build Specs

Sensors	Accelerometer, barometer, thermometer, hygrometer
Clock	Yes (CR2032)
Dimensions	1.3" x 3.62" x 4.73" (32.1mm x 92mm x 120mm)
Mount Type	DIN Edge Mount, DIN Side Mount Flex Clip (Optional)
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 50°C
Humidity	95% max, non-condensing
Compliance	UL, CE

Bardac Drives 40 Log Canoe Circle, Stevensville, MD 21666 USA
Phone (410) 604-3400 Fax (410) 604-3500 bardac.com AutomationThings.com