

Bardac DC Drive Datasheet

Model: powerPL315/750d

powerPL315/750d | 750A, 3-ph, 230V/460V, Non-Regen, Non-Reversing, DC Drive, includes: integrated input contactor, fusing, Ethernet and USB interface

Input Ratings

Supply Voltage	230V, 3-ph in 460V, 3-ph in
Input Current	615 Amps

Output Ratings

Power at 240VDC	225 HP
Power at 500VDC	450 HP
Max Field Current	32 Amps
Max Armature Current	750 Amps
Regen	No


Factory Build Options

Enclosure	Open Chassis
Frame Size	4
Dimensions (W x H x D)	18.5" x 56" x 16"
Communication Protocols	ModbusRTU, ModbusTCP/IP, EIP/PCCC, and more*

Miscellaneous

Feedback Types	Armature, Encoder, Tachometer
Max Watts Loss	2250 Watts

* Consult factory for additional communication options.

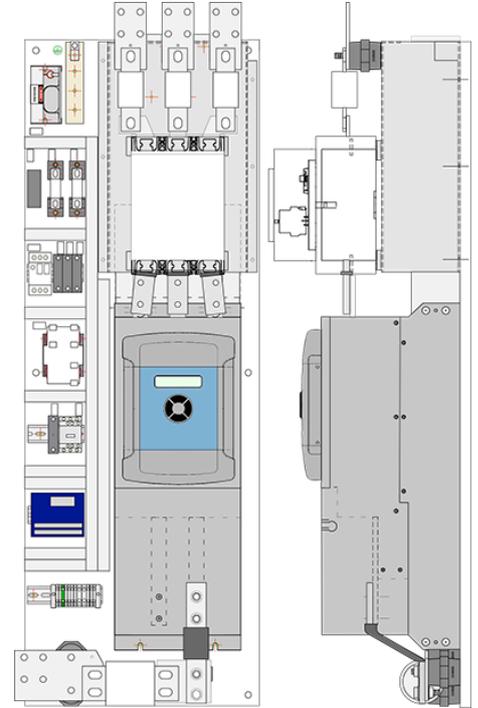

dw221 speedy (included in all suffix d PL/X drives)

Embedded controller with:

- Easy USB programming port
- Peer to peer Ethernet networking
- Programmable control functions

