
Bardac DC Drive Datasheet

Model: 3200i/32

3200i/32 | 32A, 1-ph, 120V/230V, Non-Regen, Non-Reversing, Fully Isolated DC Drive

Input Ratings

Supply Voltage	120V, 1-ph in | 230V, 1-ph in
Input Current	48 Amps

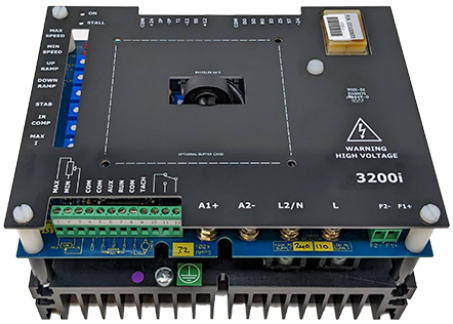

Output Ratings

Power at 90VDC	3 HP
Power at 180VDC	6 HP
Max Field Current	2 Amps
Max Armature Current	32 Amps
Regen	No

Factory Build Options

Enclosure	Open Chassis
Frame Size	0
Dimensions (W x H x D)	7.87" x 5.9" x 4.33"

Miscellaneous

Feedback Types	Armature, Tachometer
Max Watts Loss	96 Watts

Bardac Drives 40 Log Canoe Circle, Stevensville, MD 21666 USA
Phone (410) 604-3400 Fax (410) 604-3500 bardac.com AutomationThings.com