

P2 Series Variable Frequency Drive Datasheet

Model: P2-32075-3HF42-T

7.5 HP (5.5 kW), 24 A, 200-240 V, 3PH

IP20 Variable Frequency Drive with EMC Filter and TFT Display

Input Ratings

Supply Voltage	200-240 V
Input Phases	3
Supply Current Continuous	29.1 A
Supply Fuse or MCB (Type B)	40 A

Output Ratings

Motor Output Rating	7.5 HP (5.5 kW)
Output Voltage	0 to Supply Voltage
Output Current	24 A

Cable Information

Max Supply Cable Size	8 AWG (8 mm ²)
Max Motor Cable Size	8 AWG (8 mm ²)
Max Motor Cable Length	328 ft (100 m)

Factory Build Options

EMC Filter	Internal EMC
Brake Transistor	Internal
Minimum Brake Resistance	20 Ω
Enclosure	IP20
Display	TFT Display
PCB Coating	Standard
Communication Protocols	ModbusRTU, CANopen, and more*

Drive Dimensions

Size	3
Height	10.28 in (261mm)
Width	5.16 in (131mm)
Depth	8.07 in (205 mm)
Weight	7.72 lbs (3.5 kg)
Fixings	4 x M4

Packaged Dimensions

Height	12.8 in (325mm)
Width	6.5 in (165mm)
Depth	10.24 in (260mm)
Weight	8.16 lbs (3.7 kg)

Drive color depicted doesn't reflect actual drive color
Black Outershell - RAL Name: Jet Black | RAL Number: 9005 | Hex Code #0A0A0A
Gray Door - RAL Name: Traffic White | RAL Number: 9016 | Hex Code #F6F6F6




Environmental Ratings


Temperature	14 - 122°F (-10 - 50°C)
Altitude	<= 1000m With Derating: <= 4000m

* Consult factory for additional communication options.

How we measure our drives and packaging

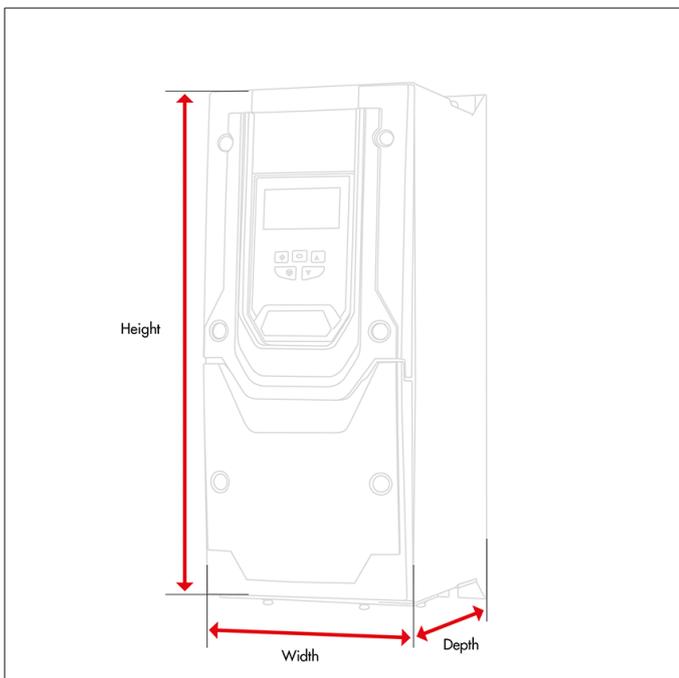

Drive Dimensions

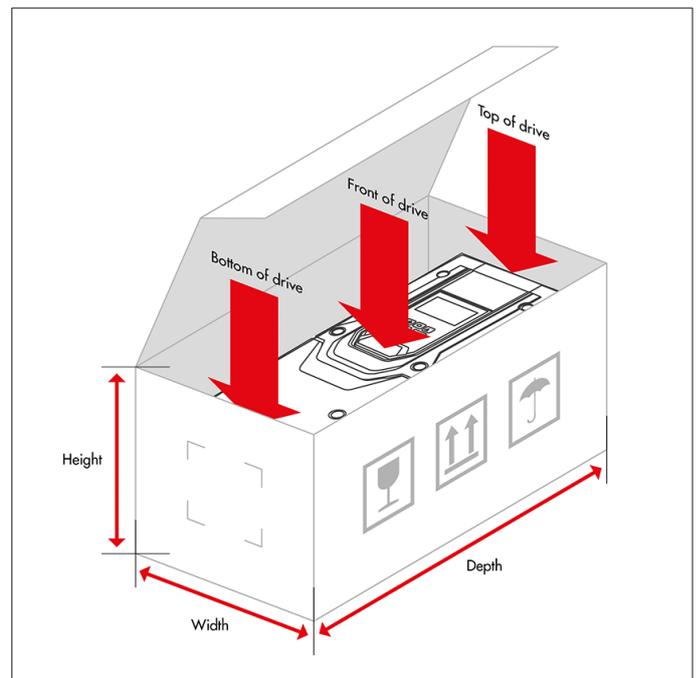

Package Dimensions